

P20 P21 P25 P30 P35 P40

JLGDANMARK
 Tel: +45 (0) 43 54 43 22
 Rosenvangen 15, 2635 Ishøj, Denmark

JLGDEUTSCHLAND
 Tel: +49 (0) 421 693 500
 JLG Deutschland GmbH,
 Max Planck Strasse 21,
 D-27721 Ritterhude/Inlpohl (Bei
 Bremen), Germany

JLGFRENCE
 Tel: + 33 (0) 553 88 31 70
 Fax: + 33 (0) 553 88 31 79
 ZI de faullet
 47400 TONNEINS, France

JLGIberica
 Tel: +34 93 772 47 00
 Plataformas Elevadoras JLG Iberica,
 Trapadella 2,
 Poligono Industrial Castellbisbal Sur,
 Barcelona, Spain

JLGIITALIA
 Tel: +39 02 9359 5210
 JLG Industries (Italia) s.r.l.,
 Via Po, 22,
 20010 Pregnana Milanese -ML-, Italy

JLGNORGE
 Tel: +47 (0) 66 82 20 00
 JLG Industries Norge AS,
 Postboks 525, Sofiemyrveien 12,
 N-1411 Kolbotn, Norway

JLGPOLSKA
 Tel: +48 (0) 91 43 58 200
 JLG Polska z.o.o.,
 Krolewska 27,
 00-060 Warszawa, Poland

JLGSVERIGE
 Tel: +46 (0) 8 506 59500
 JLG Sweden AB,
 Enköpingsvägen 150,
 Box 704,
 SE-175 27 Järfälla, Sweden

JLGUIK
 Tel: +44 (0) 870 200 7700
 JLG Industries (United Kingdom)
 Limited, Unit 12 Southside,
 Bredbury Park Industrial Estate,
 Bredbury Stockport SK6 2SP,
 United Kingdom

workplatform
 powered access specialists

T: 01332 856 359 F: 01332 810 769
 E: info@workplatformltd.co.uk W: www.workplatformltd.co.uk



PRELIMINARY



PERSONNEL MANLIFT



- P20
- P21
- P25
- P30
- P35



P 20



P 35




P 25



P 21



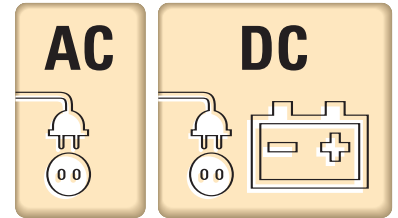

	P20	P21	P25	P30	P35	P40
 <ul style="list-style-type: none"> Working height Hauteur travail Arbeitshöhe Altura trabajo Altezza di lavoro 	8,24 m	8,28 m	9,70 m	11,16 m	12,62 m	14,10 m
 <ul style="list-style-type: none"> Stowed height Hauteur repliée Bauhöhe Alto de plataforma recogida Altezza piattaforma abbassata 	1,99 m	1,72 m	1,99 m	1,99 m	1,99 m	1,99 m
 <ul style="list-style-type: none"> Width Largeur Breite Ancho Larghezza 	0,75 m	0,75 m	0,75 m	0,75 m	0,75 m	0,75 m
 <ul style="list-style-type: none"> Length Longueur Gesamtlänge Longitud chassis Lunghezza chassis 	1,24 m	1,24 m	1,24 m	1,31 m	1,38 m	1,47 m
 <ul style="list-style-type: none"> Weight Poids Eigengewicht Peso Peso 	AC: 345 kg DC: 360 kg	AC: 330 kg DC: 345 kg	AC: 365 kg DC: 380 kg	AC: 405 kg DC: 420 kg	AC: 435 kg DC: 450 kg	AC: 500 kg DC: 515 kg
 <ul style="list-style-type: none"> Standard platform dimension Dimension panier standard Abmessungen Standard Plattform Dimensiones de la plataforma estandar Dimensioni della piattaforma standard 	0,66 x 0,66 m	0,66 x 0,66 m	0,66 x 0,66 m	0,66 x 0,66 m	0,66 x 0,66 m	0,66 x 0,66 m
 <ul style="list-style-type: none"> Work Platform capacity Capacité de la plate-forme standard Plattform Tragfähigkeit Capacidad de carga de la plataforma estandar Portata della piattaforma standard 	160 kg	160 kg	160 kg	160 kg	120 kg	120 kg
 <ul style="list-style-type: none"> Max. wind speed for outdoor use Vitesse maxi. du vent en usage extérieur Maximale Windgeschwindigkeit beim Ausseneinsatz Velocidad máxima del viento para un uso exterior Velocità massima del vento con utilizzo in area esterna 	—	12,5 m/s Option Opção Opzione	12,5 m/s Option Opção Opzione	12,5 m/s Option Opção Opzione	12,5 m/s Option Opção Opzione	—
 <ul style="list-style-type: none"> Outriggers footprint Dimension avec stabilisateurs Breite mit Abstützungen Anchura con estabilizadores Larghezza con stabilizzatori 	1,28 x 1,54 m	1,28 x 1,53 m	1,44 x 1,69 m	1,67 x 1,92 m	1,88 x 2,14 m	1,88 x 2,14 m